


REVISIONS							
ZONE	LTR.	DESCRIPTION	DATE	ECN	BY	CKD	APVD
-	-	INITIAL RELEASE	10/01/08	-	-	-	-
-	B	UPDATED TO NEW STANDARDS	10/20/15	2016-32	TB	AB	AA

PERFORMANCE SPECIFICATIONS:

- CAPACITIES: 7KG, 10KG, 15KG, 30KG, 60KG, 100KG, & 150KG
- RATED OUTPUT: 2.00 mV/V \pm 10%
- SAFE OVERLOAD: 150% FS
- EXCITATION VOLTAGE: 10-20V AC/DC
- INPUT RESISTANCE: 385 \pm 10 OHMS
- OUTPUT RESISTANCE: 350 \pm 3 OHMS
- ZERO BALANCE: \pm 1.00% FS
- SEAL TYPE: ENVIRONMENTALLY SEALED, POTTED IP67
- NON-LINEARITY: \pm 0.03% FS
- HYSTERESIS: \pm 0.02% FS
- REPEATABILITY: \pm 0.02% FS
- CREEP: \pm 0.03% FS
- COMPENSATED TEMPERATURE RANGE: -10°C - +40°C
- TEMPERATURE EFFECT ON ZERO: \pm 00.02%FS/°C
- TEMPERATURE EFFECT ON OUTPUT: \pm 0.001%FS/°C
- INSULATION RESISTANCE: >5000 MEGOHMS
- LOAD CELL CABLE: 4 CONDUCTOR, 10 FT
- LOAD CELL WIRING:
 - GREEN +EXC
 - BLACK -EXC
 - WHITE +SIG
 - RED -SIG
 - BRAID/YELLOW: SHIELD
- FM APPROVED
- MAX PLATFORM SIZE: 400 X 400 mm

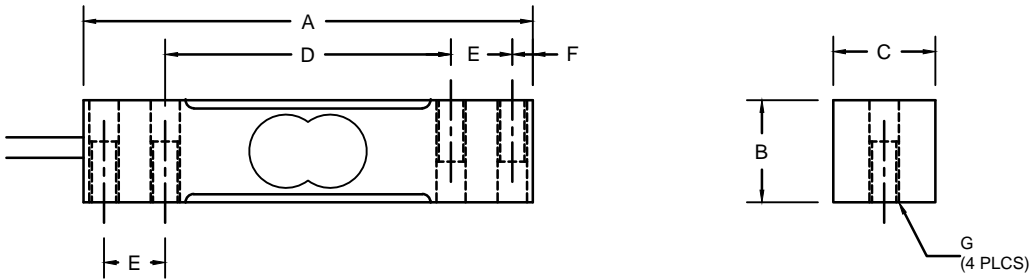

RATED CAPACITY	DIMENSIONS						G
	A	B	C	D	E	F	
7-15KG	5.50	1.19	0.75	3.50	0.75	0.25	1/4-20UNCx0.75dp
30-60KG	5.50	1.19	0.94	3.50	0.75	0.25	1/4-20UNCx0.75dp
100-150KG	5.50	1.19	1.21	3.12	0.88	0.31	3/8-16UNCx0.75dp

'DO NOT ALTER WITHOUT AGENCY NOTIFICATION'

COTI GLOBAL SENSORS, INC.

CG-PWS SINGLE POINT LOAD CELL

SCALE	SIZE	PART/DRAWING NO.	REV.
NONE	B	DOD-CG-PWS	B
MODEL CG-PWS			SHEET 1 OF 1

	APPROVALS	DATE
	DRAWN: MTSI	10/01/08
	CHECKED: MB	10/01/08
	ENGINEER: AA	10/01/08
<small>THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION AND SUCH INFORMATION MAY NOT BE REPRODUCED OR DISCLOSED FOR ANY PURPOSE OR USED TO PRODUCE THE ARTICLE OR SUBJECT WITHOUT WRITTEN PERMISSION FROM COTI GLOBAL SENSORS, INC.</small>	APPROVED: AA	10/01/08
	MATERIAL	STAINLESS STEEL
<small>TOLERANCES UNLESS OTHERWISE SPECIFIED .XX-±.01 .XXX-±.005 FRACTIONS-±1/16" ANGLES: ±1/2°</small>		